

# Kona Mega Ex IoT Gateway - NA

## Scalable Class I, Class II Div 2 and Zone 2 Rated LoRaWAN® Gateway for Outdoor Hazardous Location Deployments

TEKTELIC's **KONA Mega Ex IoT Gateway** is Rated 4X (IP67) and is Zone 2 certified, the gateway is designed for Hazardous area installations where combustible gasses, vapors or liquids may be present. It is ideal for public and private network operators that require Full Duplex, multiple Rx and Tx Channels, rugged industrial design and reliable LoRaWAN® gateways to maximize their network investment.

- Class 1 I, Class II Div 2 and Zone 2 Deployments
- Pipeline Monitoring
- Mining
- Chemical Production Facilities
- Refineries & Processing Plants
- Commercial Grain Production



## Key Product Differentiators

- » High availability carrier grade design with support of in-service configuration and software updates.
- » Certified for ATEX Class I, Class II Division 2 and Zone 2 Hazardous Area.
- » Full duplex operation making all receive and transmit channels available simultaneously.
- » Excellent isolation between the Tx and Rx bands as well as out of band rejection of Cellular and Paging networks.
- » Day-One scalability with support of up to 12 million received messages per day.
- » Easy to deploy supporting different backhaul and power options.
- » Fully integrated with the broader eco-system of LoRa® network servers and sensors.

## Key Features

- » Frequency Duplex 72 Rx / 4 Tx
- » Class I, Class II Division 2 and Zone 2 Certified
- » Double Simultaneous Tx Channels
- » High Linearity LNA/Receiver
- » Integrated Bandpass Filter
- » Precise Network Synchronization (GPS)
- » Integrated GPS Holdover
- » 1 Watt (30 dBm) Tx Power
- » Geolocation Support
- » Hardened Carrier Grade Enclosure
- » Integrated Cellular 3G/4G Modem
- » Ethernet Backhaul
- » 4X (IP67) Enclosure
- » US 915 ISM Band

# KONA Mega Ex IoT Gateway

Scalable Class I, Class II Div 2 and Zone 2 Rated LoRaWAN® Gateway for Outdoor Hazardous Location Deployments

## Technical and Functional System Specifications

### Mechanical Parameters

|                         |                        |
|-------------------------|------------------------|
| MTBF                    | 450,000 hours          |
| DC Power Consumption    | < 40 W                 |
| Operational Temperature | -40°C to +60°C         |
| Operational Humidity    | 10% to 100% Condensing |
| Ingress Protection      | 4X (IP67)              |
| Size                    | 222.2 x 267.6 x 101 mm |
| Weight                  | 5 kg                   |
| Volume                  | 5.5 L                  |

### Software and Management

|            |                                     |
|------------|-------------------------------------|
| Tools      | Access Control List management      |
|            | 3G/4G Parameter Configuration       |
|            | System Health Monitor               |
|            | Flight Recorder                     |
|            | Radio Configuration and Control     |
|            | Remote Software Upgrade             |
|            | Active and Passive image management |
|            | Factory image provisioning          |
| Networking | DHCPv4 client                       |
|            | TFTP server                         |
|            | HTTP server                         |
|            | Firewall and Access Lists           |

### LoRa Radio Parameters


|                    |                                          |
|--------------------|------------------------------------------|
| ISM Band           | 902 - 915 MHz (Rx)<br>923 - 928 MHz (Tx) |
| Tx Power           | 2 x 1W (2 x 30 dBm)                      |
| Rx Sensitivity     | -142 dBm (SF12, 293 bits/sec)            |
| Rx Noise Figure    | 3.5 dB                                   |
| Rx Linearity       | -10 dBm                                  |
| Rx Dynamic Range   | 70 dB Analog, 100+ dB Digital            |
| Tx to Rx Isolation | 75 dB                                    |

### Interfaces

|                           |                             |
|---------------------------|-----------------------------|
| Ethernet Backhaul         | RJ-45                       |
| GPS                       | N-Type                      |
| Cellular Backhaul (3G/4G) | N-Type (Optional)           |
| LoRa Antenna              | N-Type                      |
| Power                     | -48V DC or IEEE 802.3bt PoE |

### Regulatory Compliance

|                                                                                     |                                                                                                                                                       |                                                                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Safety                                                                              | Canada/USA Division Marking<br>Class I Div 2 group A B C D T6<br>Class II Div 2 Group F G T6                                                          | CSA C22.2 No. 213<br>UL 12.12.01: 2017                                                                        |
|                                                                                     | Canada/USA Zone Marking<br>Class I Zone 2 AEx ec (ic) IIC T6 Gc<br>Class I Zone 2 AEx nA (ic) IIC T6 Gc<br>Class II Zone 22 AEx tc (ic) IIIC T85°C Dc | CSA C22.2 No. 60079 0, UL 60079 0<br>CSA C22.2 No. 60079 7, UL 60079 7<br>CSA C22.2 No. 60079 11, UL 60079 11 |
| *Temperature Marking                                                                |                                                                                                                                                       | -40°C to +60°C                                                                                                |
| Environmental                                                                       |                                                                                                                                                       |                                                                                                               |
| Regulatory                                                                          | FCC Part 15.247, 109, 209                                                                                                                             |                                                                                                               |
|  |                                                                                                                                                       |                                                                                                               |

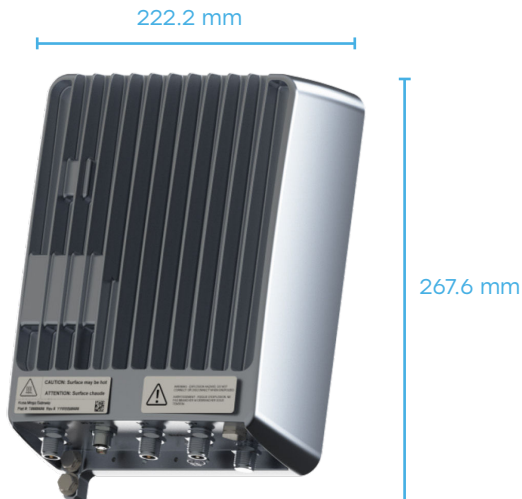

TEKTELIC Communications is a premier supplier of best-in-class LoRaWAN® IoT Gateways, Sensors, and custom applications. These elements combined provide a powerful end-to-end solution that can be easily, quickly, and cost effectively deployed to address the most demanding IoT challenges.

For more information please visit [www.tektelic.com](http://www.tektelic.com)