

TEKTELIC TUNDRA

LoRaWAN® Device for Cold Chain Environment Monitoring

TEKTELIC's TUNDRA Temperature and Humidity Sensor is the ideal solution for maintaining optimal and consistent temperatures within cold rooms and refrigerated areas. The device can be implemented within cold storage such as fridges, coolers, cold rooms and even freezers with minimal impact on battery life or radio signal strength. TUNDRA Sensor is seamlessly integrated with TEKTELIC's end-to-end IoT solution.



Sensing Functions



AMBIENT
TEMPERATURE



AMBIENT RELATIVE
HUMIDITY



ACCELEROMETER



EXTERNAL PROBE
TEMPERATURE
(ANALOG PROBE MODEL ONLY)




PULSE COUNTING FROM
EXTERNAL PROBE
(DIGITAL PROBE MODEL ONLY)

Features

- ✓ **15+ year battery life*** enabled by a low-power design for extended maintenance-free operation
- ✓ **User-configurable parameters and thresholds** allow the device to be tailored to a wide range of monitoring applications
- ✓ **Stores 3000 entries of data** to prevent loss during connectivity gaps while on the go
- ✓ **Quick and easy device onboarding & data viewing** using TEKTELIC LeapX™ mobile application
- ✓ Offers an **optional external thermistor probe** for additional temperature sensing flexibility
- ✓ TEKTELIC Kona Atlas™ support for payload encoding and decoding
- ✓ Offers an **optional external reed switch probe for pulse counting** by magnetic actuation
- ✓ **Locus™ integration** for centralized device, data, and fleet management
- ✓ Provides strong, consistent wireless performance with its **built-in internal antenna**
- ✓ **Compact industrial form factor** designed for discrete deployment
- ✓ **Compatible with standard LoRaWAN® gateways and network servers** for broad interoperability
- ✓ **Rapid deployment** for scalable commercial and enterprise installations

* Actual battery life varies based on configuration, data rate, and operating temperature.

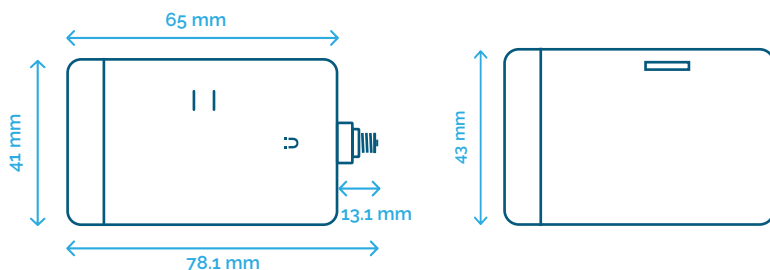

Technical and Functional System Specifications			
General System Parameters			
Operational Temperature	-40°C to 70°C		
Storage Temperature	-25°C to 55°C		
Operational Relative Humidity	5% to 95% Non-Condensing		
Ingress Protection	IP67		
Sensor Size	78 x 43 x 41 mm (with Probe) 65 x 43 x 41 mm (without Probe)		
Probe Length	1.5 m		
Weight (without the bracket or probe)	120 g total = 63.5 g (enclosure) + 56.5 g (battery)		
Battery	1 x C-Cell LTC (8500 mAh)		
Battery Life			
Reporting Period - 10 min @SF7	15 years		
Reporting Period - 10 min @SF10	7 years		
Wireless Parameters (LoRa)			
RF Power (Max)	20 dBm		
RF Sensitivity	-137 dBm (SF12, 125 kHz)		
Channel Plans	EU868, US915, AU915, AS923-1,-2,-3,-4, IN865, KR920		
Antenna	Internal		
LoRa Device Class	Class A		
Specification Version	1.0.2		
Sensor Specifications	Range	Accuracy	Resolution
Ambient Temperature	-40°C to -20°C	+/- 0.9°C	0.1°C
	-20°C to 0°C	+/- 0.3°C	
	0°C to 40°C	+/- 0.9°C	
	40°C to 70°C	+/- 1.2°C	
External Probe Temperature	-40°C to 105°C	+/- 2°C	0.1°C
Ambient Relative Humidity	0% - 100%	+/- 4%	0.5%
	20% - 80%	+/- 2%	
Accelerometer Sensitivity	Sample rate: 1, 10, 25, 50, 100, 200, 400 Hz Measurement range: +/-2, +/-4, +/-8, +/-16 g Precision: 16, 32, 64, 192 mg		
Certifications & Compliance			
Regulatory	FCC, ISCED, CE (RED)		
Product Safety	IEC 62368-1		
Environmental	RoHS		

TEKTELIC Communications is a premier supplier of complete LoRaWAN® IoT solutions. Our end-to-end systems combine network infrastructure, devices, and applications to enable easy, fast, and cost-effective deployment for the most demanding IoT challenges.

