

PELICAN ASSET TRACKER



User Guide

Document Number : T0006940

Document Version : 3.1

Product Names and T-Codes :	PELICAN Enterprise Asset Tracker (Outdoor)	T0006906 – Wall-Mount
------------------------------------	--	-----------------------

Release Date : May 12, 2026

PROPRIETARY:

The information contained in this document is the property of TEKTELIC Communications Inc. Except as specifically authorized in writing by TEKTELIC, the holder of this document shall keep all information contained herein confidential, and shall protect the same in whole or in part from disclosure to all third parties.

Table of Contents

1	Product Description	6
1.1	Overview	6
1.2	Specifications.....	7
2	Installation	9
2.1	Included Product and Installation Material.....	9
2.2	Unpacking and Inspection	9
2.3	Commissioning	9
2.4	Activation	9
2.5	Default Configuration	10
2.6	Reconfiguration	10
2.7	Battery Replacement.....	10
2.8	Reset Function	12
2.9	LED Behaviour	12
3	Sensing Functions	13
3.1	Magnetic Sensor	13
3.2	Bluetooth Low-Energy (BLE) Transceiver	13
3.2.1	Tracker Mode	14
3.2.2	Beacon Mode	15
3.3	MCU Temperature Transducer.....	16
3.4	Accelerometer Transducer.....	16
4	Configuring, Monitoring, and Integrating PELICAN.....	17
4.1	ATLAS – Device Configuration and Data Viewing.....	17
4.2	LeapX – Fast Device Activation and Data Viewing.....	19
4.3	Data Converters – Decoding and Integration.....	20
5	LOCUS Application	22
5.1	Description	22
5.2	Operation principle	22
6	Troubleshooting.....	23
7	Compliance Statements and Safety Precautions	24
7.1	Compliance Statements	24

7.2 Safety Precautions..... 25

Table of Figures

Figure 1-1: PELICAN Enclosures and External Interfacing	7
Figure 2-1: PELICAN Enclosures and External Interfacing	10
Figure 2-2: Removing and Battery Cover Screws	11
Figure 2-3: Polarity Marker and Battery Insertion	11
Figure 2-4: Proper Replacement Orientation of the Battery Cover	11
Figure 2-5: Magnetic Activation Site	12
Figure 3-1: Magnetic Sensor	13
Figure 4-1: Login with Offline Mode	17
Figure 4-2: Select PELICAN Decoder.....	17
Figure 4-3: Login with Network Server Credentials	18
Figure 4-4: Select PELICAN Decoder, application, and device	18
Figure 4-5: Device Configuration with ATLAS	19
Figure 4-6: PELICAN Example on LeapX	20
Figure 5-1: LOCUS Overview	22

Table of Tables

Table 1-1: PELICAN Functionality	6
Table 1-2: PELICAN HW Models	6
Table 1-3: PELICAN Specifications	7
Table 2-1: Default Reporting Periods	10
Table 2-2: Summary of LED Patterns.....	12
Table 3-1: Summary of BLE Modes	14
Table 4-1: Tick Reporting Example	19
Table 6-1: Troubleshooting Advice	23

1 Product Description

1.1 Overview

The PELICAN device provides reliable asset tracking by utilizing periodic BLE scanning to collect data from nearby BLE peripherals to determine device location, or to act as a broadcasting BLE peripheral beacon.

PELICAN is connected via LoRaWAN, enabling seamless transmission and reception across various global frequency bands EU868, US915, AU915, AS923-1,-2,-3,-4, IN865, KR920.

This document provides comprehensive descriptions of each PELICAN variant, along with detailed guidance on their hardware capabilities. For insights into the functional operation and software behavior of each variant, please consult the [Technical Reference Manual \(TRM\) document](#).

Table 1-1 presents all PELICAN supported functions as well as enclosure and mounting options.

Table 1-1: PELICAN Functionality

Functionality	PELICAN
Module Product T-Code	T0006906
Supported Operating Environment	Outdoor (IP67)
Battery Size	C-cell LTC
Battery Gauge	✓
BLE Rx	✓
BLE Tx	✓
Magnetic Sensor	✓
Accelerometer	✓
LEDs	✓

Table 1-2: PELICAN HW Models

Description	Product Model	Order Code	Region	Product PCBA Code
PELICAN Enterprise Asset Tracker	T0006906	SENOMNEU868	EU868	T0008176
PELICAN Enterprise Asset Tracker	T0006906	SENOMNUS915	US915	T0008176
PELICAN Enterprise Asset Tracker	T0006906	SENOMNAU915	AU915	T0008176
PELICAN Enterprise Asset Tracker	T0006906	SENOMNAS9231	AS923	T0008176

The enclosure and external interfacing layouts are shown in Figure 1-1.

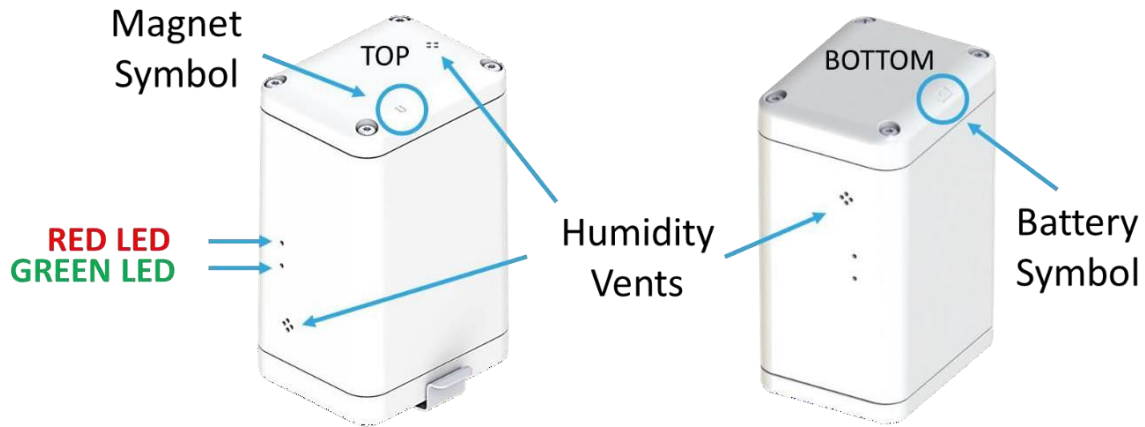


Figure 1-1: PELICAN Enclosures and External Interfacing

1.2 Specifications

The PELICAN specifications are listed in Table 1-3. The main sensing functions are described in the following subsections.

Table 1-3: PELICAN Specifications

Parameter	Specification
Environmental Rating	IP67
Enclosures and Mounting	Custom design by TEKTELIC
Operating Temperature	-40°C to 70°C
Storage Temperature for Optimal Battery Life	-25° to 55°C
Operating Relative Humidity	5% - 95% non-condensing
Storage Relative Humidity	10% - 100% non-condensing
Dimensions	65 mm x 45 mm x 41 mm (with bracket) 65 mm x 43 mm x 41 mm (without bracket)
Weight	63.5 g enclosure + 56.5 g battery = 120 g total (without bracket)
Power Source	Battery-powered: 1x C-cell LTC (3.6 V)
Network technology/Frequency band	LoRaWAN in the following Global ISM bands: EU868, US915, AU915, AS923-1,-2,-3,-4, IN865, and KR920
Air Interface	LoRa, BLE
Maximum Tx Power	15 dBm, all bands
Sensing Elements	BLE transceiver, accelerometer, MCU thermometer, magnetic hall-effect sensor, battery gauge
Bluetooth Compatibility	BLE based on Bluetooth 5.3
LoRa RF Sensitivity	Up to -137 dBm (SF12, 125 kHz BW)
BLE Sensitivity (0.1% BER)	125 kbps: -103 dBm 500 kbps: -98 dBm 2 Mbps: -91 dBm

Accelerometer Sensitivity	Sample rate: 1, 10, 25, 50, 100, 200, 400 Hz Measurement range: ± 2 , ± 4 , ± 8 , ± 16 g Precision: 16, 32, 64, 192 mg
LEDs	Green: Joining the network activity Red: LoRa Tx or Rx activity
Battery Gauge Features	Measures remaining capacity [%] and remaining lifetime [days]
Battery Lifetime	15+ years ¹ 4.5 years ² in Beacon mode

¹ With default settings operating at DR2. Applicable to NA region only.

² With default settings and no event-based reports, operating at DR2. Applicable to NA region only.

2 Installation

2.1 Included Product and Installation Material

The following items are shipped with each device:

- 1x device inside an enclosure with a 3.6 V C-cell LTC battery installed.
- 1x corresponding device Quick Start Guide.
- 1x mounting bracket.

NOTE: to ensure safe installation and maintenance, please read Section 7.2.

2.2 Unpacking and Inspection

The following should be considered during the unpacking of a new device.

1. Inspect the shipping carton and report any significant damage to TEKTELIC.
2. Unpacking should be conducted in a clean and dry location.
3. Do not discard the shipping box or inserts as they will be required if a unit is returned for repair or re-configuration.

2.3 Commissioning

Each device has a set of commissioning information that must be entered into the network server for the device to be able to join the network and begin normal operation once activated. For instructions on how to do this please refer to the Network Server Quick Start Guide you get in the box with the device (also available online in the [Knowledge Base](#)).

2.4 Activation

The device is shipped in a secured enclosure with the battery preinstalled in a state of DEEP SLEEP.

To activate/reset the device:

1. Place the magnet for **3 to 10 seconds** at the magnetic activation site as shown in Figure 2-1 below.
2. Device activation will be displayed by **GREEN** and **RED** LEDs turning on.
3. Once activated, the device will automatically begin the join process.

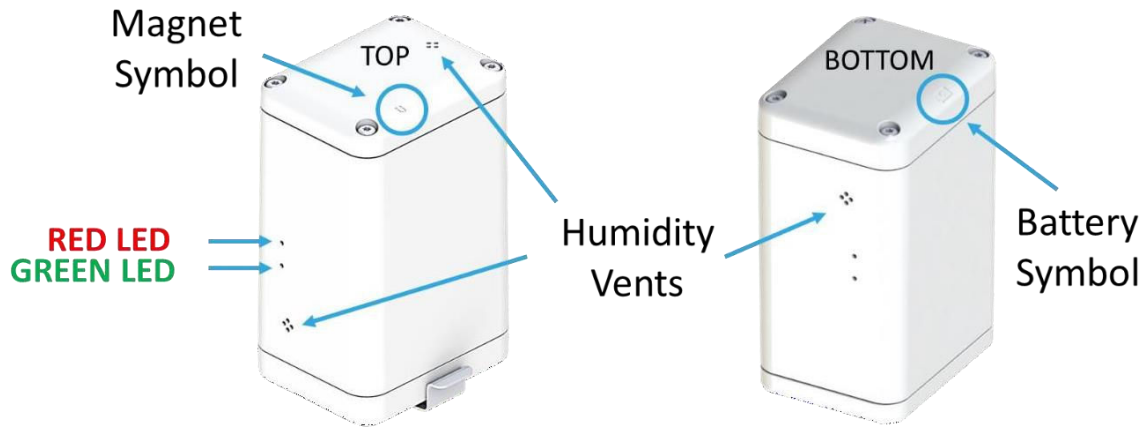


Figure 2-1: PELICAN Enclosures and External Interfacing

To return to Deep sleep there are two options:

1. Send a DEEP SLEEP command in a downlink on port 99
2. Apply the magnet for **3-10 seconds** while the device is in state of network search (process is indicated by **GREEN** LED active blinking).

2.5 Default Configuration

Table 2-1 lists the default reporting behaviour of the PELICAN. Reporting behaviour can be changed from default through OTA DL commands (see how to do it in Section 4).

Table 2-1: Default Reporting Periods

Reported Data	Default Reporting Period, Tracker Mode	Default Reporting Period, Beacon Mode
Battery Capacity	24 hours	24 hours
BLE Location Update in MOTION State	1 minute	Disabled
BLE Location Update in STATIONARY State	1 hour	Disabled
Acceleration Vector	Disabled	Disabled
MCU Temperature	Disabled	Disabled

2.6 Reconfiguration

The PELICAN supports a full range of OTA configuration options. Specific technical details are available in the corresponding [TRM documents](#). All configuration commands need to be sent OTA during the device's DL Rx windows.

2.7 Battery Replacement

The battery cover is marked with a battery symbol and uses Phillips Head H1 screws. This cover needs to be removed to replace the battery.

1. Remove the battery cover by unscrewing the 4x Phillips head screws using a size #1 Phillips head screwdriver.



Figure 2-2: Removing and Battery Cover Screws

2. Remove the used battery and replace it with a new 3.6V XENO XL-145F battery **ONLY**. When inserting the new battery, insert the negative terminal side first. The battery contact on the battery cover is the positive contact and is marked with a plus-sign (+).

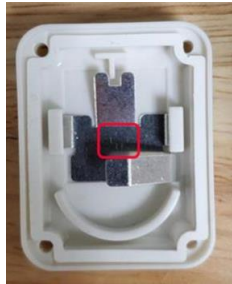


Figure 2-3: Polarity Marker and Battery Insertion

Before reattaching the battery cover, ensure the proper orientation of the cover by placing the battery symbol next to the mounting feature as seen in Figure 2-4.



Figure 2-4: Proper Replacement Orientation of the Battery Cover

3. Reassemble the cover to the chassis by using the 4x Phillips head screws, using a #1 size screwdriver and up to 0.3 Nm of torque.

2.8 Reset Function

To physically reset PELICAN perform same steps as to get in out of DEEP SLEEP state:

1. Place magnet against the enclosure at the magnetic activation site as in Figure 2-5.

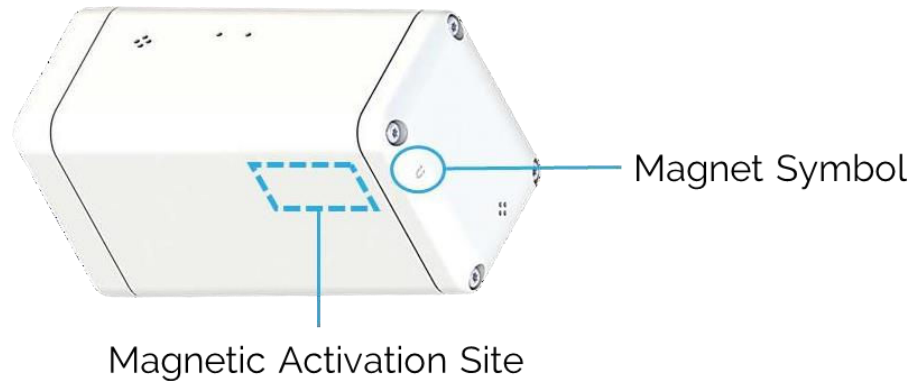


Figure 2-5: Magnetic Activation Site

2. Sustain magnet for **3 to 10 seconds**. Device activation will be displayed by **GREEN** and **RED** LEDs turning on.
3. Once activated, the device will automatically begin the join process.

NOTE: Shutting down or resetting the sensor will cause all unsaved user configurations to be lost. Save the desired configuration to the sensor flash before powering off or resetting.

2.9 LED Behaviour

The LEDs are normally off and the main patterns are summarized Table 2-2. The detailed sequence and timings for each are described in the following subsections.

Table 2-2: Summary of LED Patterns

LED Pattern	Meaning
GREEN blinking rapidly and single RED flash every 10 s	JOIN mode; attempting to join the network
Single RED flash	UpLink sent
Single GREEN flash	DownLink received
3 quick RED flashes	Entering DEEP SLEEP
Three GREEN blinks	Exiting DEEP SLEEP

3 Sensing Functions

3.1 Magnetic Sensor

The PELICAN variants are equipped with a magnetic hall-effect sensor included to address these purposes:

1. To wake the device from DEEP SLEEP as described in Section 2.4.
2. To put the device to DEEP SLEEP.
3. To reset the device.
4. To force a LoRaWAN UpLink.

The position on the exterior of the enclosure on which the magnet must be placed on a Magnetic Activation Site to activate the reed switch is shown in Figure 3-1 below.

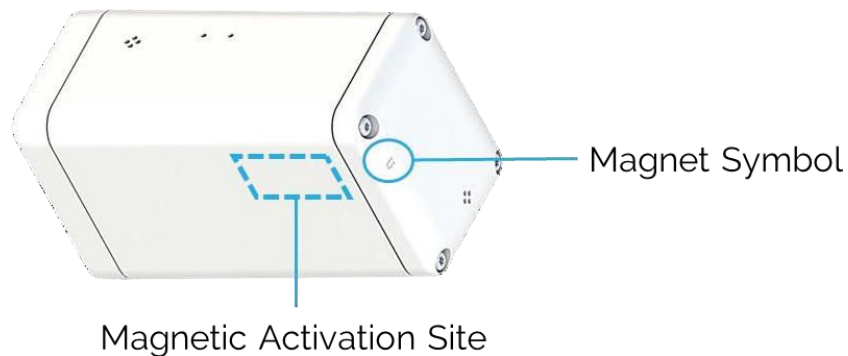


Figure 3-1: Magnetic Sensor

For more information on how to use the magnetic sensor, please refer to the [TRM](#) document.

3.2 Bluetooth Low-Energy (BLE) Transceiver

BLE operation is the main function of the PELICAN and forms the basis for asset tracking through TEKTELIC's LOCUS application. In LOCUS, asset localization works by analyzing the strength of

Bluetooth signals between PELICAN and nearby beacons to estimate position with an accuracy of about 2–5 meters (see Section 5 for more details on LOCUS).

To support this, PELICAN can operate in two BLE modes:

- **Tracker Mode (default):** The device listens for nearby BLE devices, records their signal strength, and reports the data via LoRaWAN uplinks.
- **Beacon Mode:** The device broadcasts BLE advertisements so it can be detected by other scanners.

The device is LoRaWAN-backhauled, meaning all data is sent via LoRaWAN uplinks and device configuration can be updated via downlinks.

A summary of the two BLE modes is shown below.

Table 3-1: Summary of BLE Modes

Feature	Tracker Mode	Beacon Mode
BLE Direction	Receives only (Rx)	Transmits only (Tx)
Visibility to Other BLE Devices	Not visible to other devices	Visible to other devices
Purpose	Finds nearby BLE devices for location/asset tracking	Makes PELICAN discoverable to other devices
LoRaWAN Usage	BLE scan data, configuration, battery reports, MAC address	Configuration, battery reports, MAC address
Power Usage	Depends on scan duty cycle (higher duty cycle = more power)	Depends on advertising interval (shorter interval = more power)

3.2.1 Tracker Mode

In Tracker Mode, the BLE only receives (Rx) but doesn't broadcast, making it not visible to other BLE devices.

During each scan, the tracker finds nearby advertising BLE devices and saves their info (MAC address and signal strength) for later reporting in a LoRaWAN data report UL. This report usually happens right after the scan, but might wait due to LoRaWAN duty cycle limitations³.

You can adjust how often reports happen and decide whether to scan for BLE when motion is detected or cleared via the Accelerometer Assist (which is on by default). Each BLE scan lasts for

³ If a new BLE scan occurs before the results of the previous scan have been sent, the old scan results will be discarded.

a set time, split into intervals for scanning on different BLE channels.

NOTE: By default, a BLE scan and report is conducted every 60 min in tracker mode.

In the scan interval, BLE scanning occurs only during the configurable scan window, which is a percentage of the total interval called duty cycle. A 100% duty cycle means continuous scanning throughout the interval, maximizing the chance of finding nearby BLE packets. Lowering the duty cycle reduces power usage but might miss some signals.

You can turn off BLE scanning completely in tracker mode, and it's passive, meaning the tracker only listens to beacons without sending requests for more info.

At the end of each scan duration, the tracker reports the amount of discovered BLE devices and their signal strengths over LoRaWAN.

You can set up to 4 ranges to filter discovered BLE devices by MAC address.

NOTE: The BLE and LoRa radio activity are mutually exclusive. If any LoRaWAN reporting is due at the same time as a BLE scan, the reporting will be done after the BLE scan is complete.

See the [TRM](#) for more details about tracker mode operation and configuration.

3.2.2 Beacon Mode

NOTE: tracker mode is default for sensor, so it must be switched into beacon mode.

In beacon mode, the BLE only transmits (Tx). It regularly sends out small packets of data called BLE advertisements, detectable by other PELICANs in tracker mode and any BLE-scanning device. You can adjust the transmission power level.

Once a device joins the LoRaWAN network, it starts broadcasting BLE advertisements continually in the background. The user can set the interval between these transmissions.

Each BLE advertisement consists of three separate packet transmissions, increasing the chance of detection by devices scanning on any of these channels.

The BLE advertising packet format supports three major BLE standards: iBeacon, Eddystone UID, and Eddystone TLM. By default, only iBeacon is enabled.

NOTE: BLE advertisement and LoRa radio transmission are mutually exclusive. If LoRaWAN reporting is due the BLE advertisements are paused while the LoRa activity is occurring.

See the [TRM](#) for more details about tracker mode operation and configuration.

3.3 MCU Temperature Transducer

The PELICAN can measure and report the MCU temperature. This is a temperature measurement using a sensor located in the device microprocessor.

3.4 Accelerometer Transducer

PELICAN supports motion sensing through an integrated 3-axis accelerometer which can optionally be disabled. The main role of the accelerometer is to detect motion that can indicate a change of the sensor's status from stillness to mobility and back.

The accelerometer generates an acceleration alarm when a motion event is detected that may be reported OTA (user-configurable). An acceleration event report is based on exceeding a defined acceleration alarm threshold count in a defined alarm threshold period. These thresholds can be customized such that there will not be multiple reports for a single event. An alarm event can only be registered after a configurable grace period elapses since the last registered alarm event.

The accelerometer can also be polled periodically for its output acceleration vector for applications in which the sensor's orientation is of interest.

4 Configuring, Monitoring, and Integrating PELICAN


TEKTELIC offers several tools and resources to configure your PELICAN device, view its data, and integrate it with other platforms. The three main components are ATLAS, LeapX, and Data Converters.

4.1 ATLAS – Device Configuration and Data Viewing

ATLAS (www.atlas.tektelic.com) is TEKTELIC’s web-based platform for configuring PELICAN devices and viewing device data. You can log in using:

- Offline Mode – Configure without a network connection.
- Network Server Credentials – Full access with your TEKTELIC Network Server account.


1) To use Offline Mode:

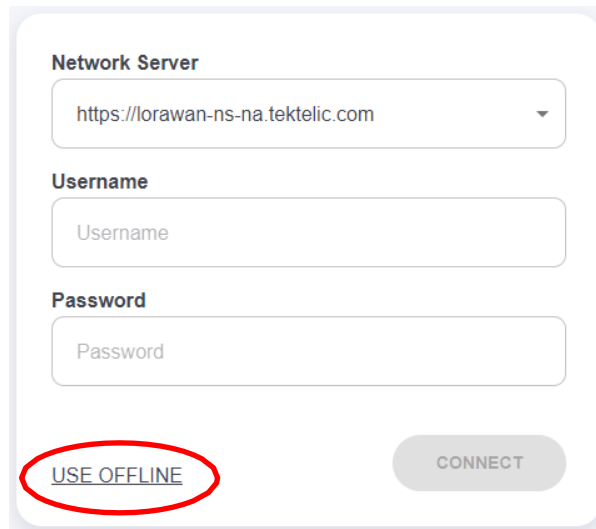

The screenshot shows a login form with the following fields and buttons:

- Network Server:** A dropdown menu with the value "https://lorawan-ns-na.tektelic.com".
- Username:** A text input field with the placeholder "Username".
- Password:** A text input field with the placeholder "Password".
- USE OFFLINE:** A button circled in red, located at the bottom left of the form.
- CONNECT:** A button located at the bottom right of the form.

Figure 4-1: Login with Offline Mode

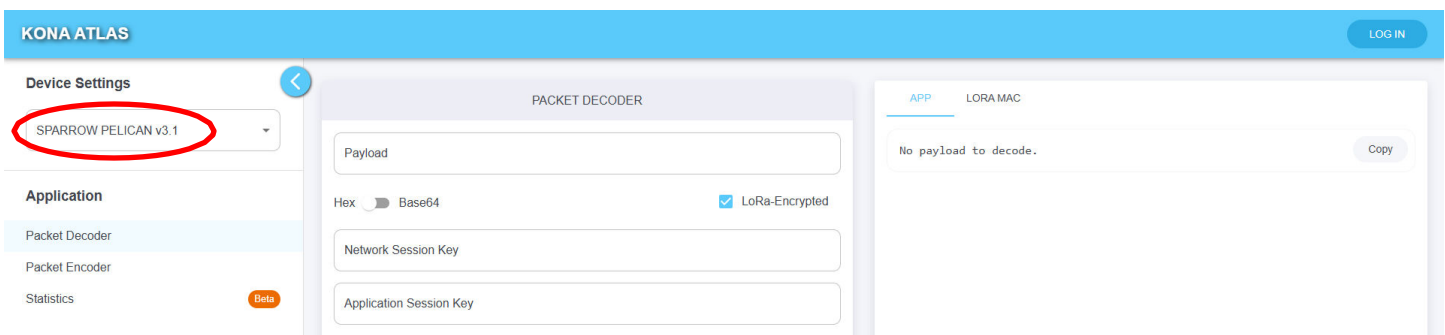

The screenshot shows the KONA ATLAS interface with the following elements:

- Header:** "KONA ATLAS" on the left and "LOG IN" on the right.
- Left Sidebar:** A navigation menu with "Device Settings" selected. The "SPARROW PELICAN v3.1" option is circled in red. Other options include "Application", "Packet Decoder", "Packet Encoder", and "Statistics".
- Main Content Area:** Titled "PACKET DECODER". It contains a "Payload" input field, a "Hex" toggle (set to "Base64"), a "LoRa-Encrypted" checkbox (checked), and two "Network Session Key" and "Application Session Key" input fields.
- Right Panel:** Titled "APP" and "LORAMAC". It shows "No payload to decode." and a "Copy" button.

Figure 4-2: Select PELICAN Decoder

The image shows a login interface with the following fields and elements:

- Network Server:** A dropdown menu containing the URL `https://lorawan-ns-na.tektelic.com`.
- Username:** A text input field containing `test@tektelic.com`.
- Password:** A password input field with masked characters (dots).
- Buttons:** A blue **CONNECT** button and a USE OFFLINE link.

Figure 4-3: Login with Network Server Credentials

The image shows the 'KONA ATLAS' interface with the following sections:

- Header:** 'KONA ATLAS' in a blue bar.
- Device Settings:** A section with a back arrow icon, containing four dropdown menus:
 - Select sensor*: SPARROW PELICAN v3.1
 - Select sub-customer
 - Select application*: Pelican BLE device-to-device test
 - Select device*
- Application:** A list of options: Packet Decoder (highlighted), Packet Encoder, and Statistics (with a 'Beta' badge).

Figure 4-4: Select PELICAN Decoder, application, and device

PELICAN uses a “tick” system to control how often data is reported:

- **Core Reporting Tick (seconds):** The base interval for reporting. Example: 180 seconds = 1 tick every 3 minutes.
- **Ticks per [Data Type] Report:** The number of ticks before sending specific data. Example: If the Core Tick is 180s and Ticks per Battery Report is 4, battery data

is sent every 12 minutes.

You can change these values in ATLAS by checking the relevant boxes, entering the new values, and clicking Send. See Table 4-1 for an example of how the tick system works.

Table 4-1: Tick Reporting Example

Setting	Value	Result
Core Reporting Tick	180 seconds	One tick occurs every 3 minutes
Ticks per MCU Temperature Report	1	Temperature reported every 1 x 180s = 3 minutes
Ticks per Battery Report	4	Battery reported every 4 x 180s = 12 minutes

For example, with ATLAS: check the box for Core report tick in seconds and Ticks per MCU Temperature report. Write the values shown in the Figure 4-5 and click send.

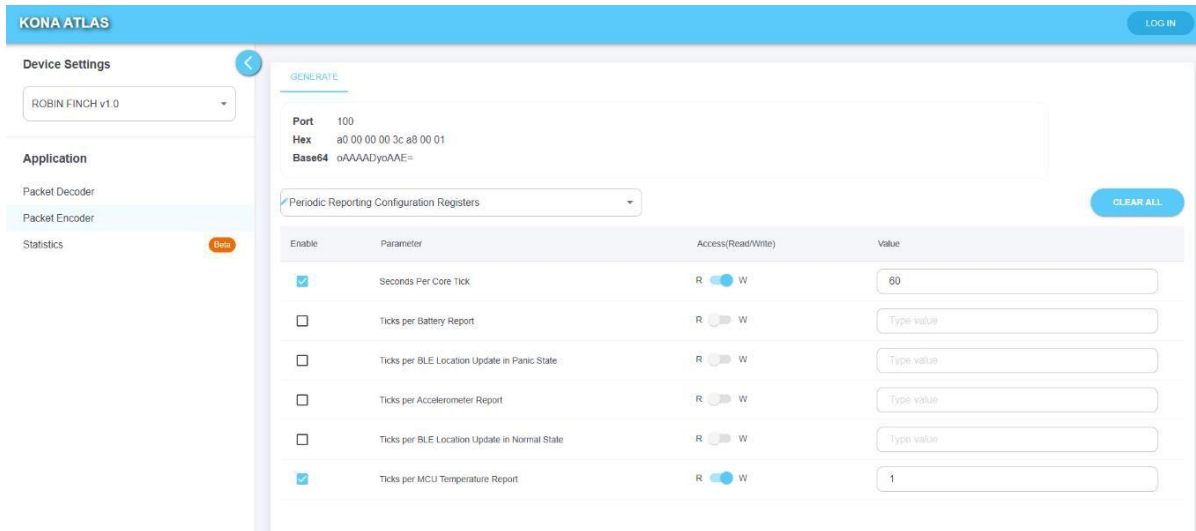


Figure 4-5: Device Configuration with ATLAS

For more information, please follow this link: <https://knowledgehub.tektelic.com/kona-atlas>

4.2 LeapX – Fast Device Activation and Data Viewing

LeapX is a mobile app for quick device activation. Scan your PELICAN’s QR code to securely add it to your Network Server account. Once activated, the app displays live device data within seconds. Figure 4-6 below shows an example of a PELICAN device on LeapX.



Figure 4-6: PELICAN Example on LeapX

For more details, see the LeapX Quick Start Guide.

4.3 Data Converters – Decoding and Integration

PELICAN reports its data as raw LoRaWAN payloads, which must be decoded into human-readable values (e.g., battery level, temperature, BLE device list). This decoding is handled by data converters.

TEKTELIC provides a library of converters for PELICAN and other TEKTELIC sensors:

- Repository: [GitHub – TEKTELIC Data Converters](#)

- Standard: All converters conform to the [LoRa Alliance Payload Codec Specification](#).

These converters can be used directly with supported network/application servers or as a reference for creating decoders on other platforms.

5 LOCUS Application

5.1 Description

LOCUS is an application to track and monitor all assets in your network, including indoor, outdoor, and hazardous location asset tracking. Assets can be tracked across entire campuses, multiple buildings, and floors. For more detail about LOCUS please visit the [Knowledge Hub: LOCUS](#).

Application capabilities:

- Self-managed floor plan/map loading
- User management – permission levels
- Geofencing & alerts
- API to customer database integration
- Support of multiple campuses, buildings & floors
- Device management/battery status
- Integrated to enterprise SAP

5.2 Operation principle

Asset localization works by measuring the strength of Bluetooth signals between the asset and nearby beacons. By comparing these signals, the system can estimate the tag's location with an accuracy of about 2-5 meters.

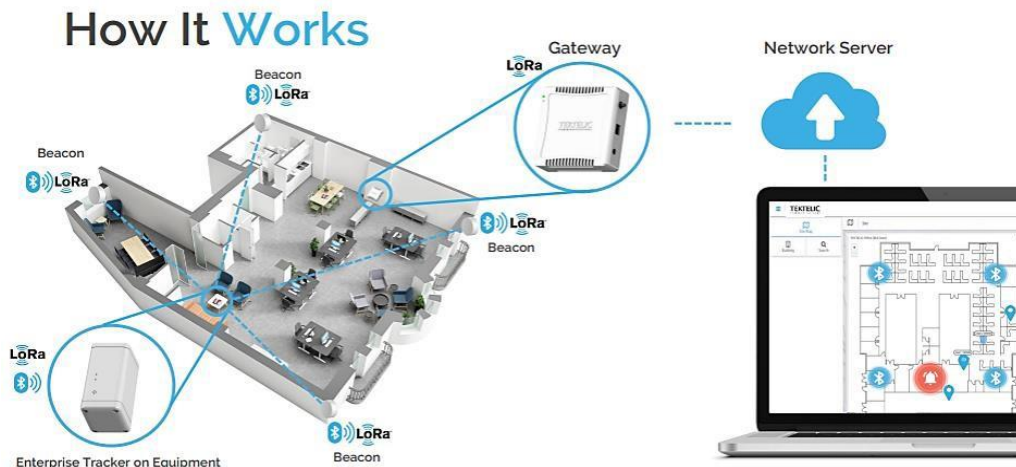


Figure 5-1: LOCUS Overview

6 Troubleshooting

Table 6-1: Troubleshooting Advice

Question	Answer
Why is the System LED rapidly blinking on my sensor?	While a sensor is not joined to a network it will continuously blink the System LED to indicate its unconnected status to the user. Ensure your LoRaWAN gateway is connected to your Network Server and verify the DevEUI, AppEUI and AppKey for the device.
Why does my LoRa LED blink periodically?	The LoRa LED indicates LoRa traffic being sent or received by the device. A short blink indicates the sensor has just transmitted, while a longer blink indicates the sensor has received a message.
How do I add my sensor to a Network Server?	Provisioning a sensor on a Network Server will vary based on your Network Server provider. An example of how to perform this on the TEKTELIC Network Server is available in your sensor's user manual. Most network server providers will require you to enter the DevEUI, AppEUI and AppKey of your device on their service.
What version of LoRaWAN do the sensors implement?	All TEKTELIC Sensor products run LoRaWAN 1.0.2
The serial numbers on my case are different from the serial numbers on the circuit board. Did my order get mixed up?	All TEKTELIC products have multiple serial numbers so we can track the devices at each stage of production. It is normal that your sensor board and sensor assembly have different numbers.
What can I find the commissioning values for my sensors? (DEVEUI, APPEUI and APPKEY)	We keep the commissioning values for each sensor secure on our own server. We send the commissioning values for each sensor sent with a shipment but if this was misplaced, please send the serial number the revision and the Tcode of the sensor and we can get the information for you.
Why is my sensor sending more packets than the Network Server receives?	This occurs when the channel plan does not reflect the number of channels accepted by the gateway. By default, all sensors come up in 64 channel mode which results in lost packets if a gateway with less than 64 channels is used. If you have an 8-channel gateway for example, ensure this is configured in the device settings in the Network Server. In the TEKTELIC NS under the "advanced network settings" tab change the configuration of the "default channel mask" to reflect the number of channels used by the gateway used.

7 Compliance Statements and Safety Precautions

7.1 Compliance Statements

Federal Communications Commission:

This device complies with Part 15 of the FCC Rules. Operation is subject to following conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

To comply with FCC exposure limits for general population / uncontrolled exposure, this device should be installed at a distance of 20 cm from all persons and must not be co-located or operating in conjunction with any other transmitter.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in an industrial installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Innovation, Science and Economic Development Canada (Industry Canada):

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s) [8]. Operation is subject to the following two conditions:

- i. This device may not cause interference, and

- ii. This device must accept any interference, including interference that may cause undesired operation of the device.

This device should be installed and operated with minimum distance 0.2 m from human body.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage.*
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

Cet appareil doit être installé et utilisé à une distance minimale de 0.2 m du corps humain.

California Proposition 65:

WARNING: This product can expose you to chemicals including lead, nickel, and carbon black, which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

7.2 Safety Precautions

The following safety precautions should be observed for all sensor variants:

- All installation practices must be in accordance with the local and national electrical codes.
- Replace only with approved batteries (see Section 2.7).
- The sensor contains a single LTC C-cell battery. When used correctly, lithium batteries provide a safe and dependable source of power. However, if they are misused or abused, leakage, venting, explosion, and/or fire can occur. The following are recommended safety precautions for battery usage.
 - Keep batteries out of the reach of children.
 - Do not allow children to replace batteries without adult supervision.
 - Do not insert batteries in reverse.
 - Do not short-circuit batteries.
 - Do not charge batteries.
 - Do not force discharge batteries.
 - Do not mix batteries.
 - Do not leave discharged batteries in equipment.
 - Do not overheat batteries.
 - Do not weld or solder directly to batteries.
 - Do not open batteries.
 - Do not deform batteries.
 - Do not dispose of batteries in fire.
 - Do not expose contents to water.
 - Do not encapsulate and/or modify batteries.
 - Store unused batteries in their original packaging away from metal objects.
 - Do not mix or jumble batteries

List of Acronyms

BER	Bit Error Rate
BLE	Bluetooth Low-Energy
CNR	Cahiers des charges sur les Normes Radioélectriques (RSS)
DL	DownLink
EOS	End Of Service
EU	European Union
FCC	Federal Communications Commission
FW	FirmWare
HW	HardWare
IoT	Internet of Things
IP	Ingress Protection
ISM	Industrial, Scientific, and Medical
LED	Light-Emitting Diode
LoRa	Long-Range
LoRaWAN	Long-Range Wide-Area Network
LoS	Line-of-Sight
LTC	Lithium-Thionyl Chloride
MCU	MicroController Unit
NA	North America
NS	Network Server
OTA	Over The Air
PCB	Printed Circuit Board
PCBA	Printed Circuit Board Assembly
Rev	Revision
RF	RadioFrequency
RSS	Radio Standards Specifications (CNR)
RSSI	Received Signal Strength Indicator
Rx	Receive, receiver, etc.
SW	SoftWare
TRM	Technical Reference Manual
Tx	Transmit, Transmitter, etc.
UG	User Guide
UL	UpLink
US	United States
v	Version

Document Revision

Revision	Issue Date	Status	Editor	Comments
0.1	May 4, 2021	Obsolete	C. M.	Initial draft based on full BLE Gen2 UG (including ATEX) T0006940_UG_v0.1
0.2	June 1, 2021	Obsolete	M. W.	Updated Lighthouse variants T0007296 and T0007381 to be indoor use only (non-IP67) as per CSA results.
1.0	June 11, 2021	Obsolete	C. M.	Corrected the default battery UL interval for Tundra sensors to 1 hour.
1.1	August 10, 2022	Obsolete	S. M.	Corrected model T-code (T00006909 should be T00006906)
2.0	December 5, 2023	Obsolete	C. M.	<ul style="list-style-type: none"> Updated to include only information relating to PELICAN and TUNDRA variants to reflect updated mechanical design. Updated specifications. Added information about the probe function. Minor grammatical and formatting changes.
2.1	December 8, 2023	Obsolete	C. M.	<ul style="list-style-type: none"> Updated photos to reflect actual enclosure. Minor grammatical and formatting changes.
3.0	September 5, 2024	Obsolete	M. Y.	<ul style="list-style-type: none"> Formatting changes.
3.1	May 12, 2026	Released	A. K., E.T.	<ul style="list-style-type: none"> Added Table 1-2 with Order Codes. Updated hyperlink, and formatting changes. Removed obsolete Model codes